

MIXER DESIGN FOR A HIGH PERFORMANCE BIOGAS SI ENGINE CONVERTED FROM AN DIESEL ENGINE

Bui Van Ga, Tran Van Nam

The University of Danang

41 Le Duan, Danang, Vietnam

Email: buivanga@dongcobiogas.com



Abstract

The performance and pollution emission of biogas engines strongly depend on the fuel-air equivalence ratio of the mixture. Thus an appropriate design of the mixer is the main issue in converting an existing diesel engine into a biogas spark ignition engine.

This paper presents some results of simulation and experiment research on a venturi type mixer for a biogas SI engine converted from a ZH1115 diesel engine. The results show that the fuel-air equivalence ratio of the mixture is less dependent on the opening of the butterfly valve which controls the mixture but it sharply depends on CH₄ concentration in the biogas and/or on section of the biogas supplying pipe. At full load, the fuel-air equivalence ratio is slightly changed in relation to the engine speed but at partial load, it strongly depends on the engine speed, particularly at low regime. The dimensionless diameter of the biogas supplying pipe can be expressed by a power relationship with CH₄ concentration in biogas with an exponent of -0.515.

Keywords: *Biogas, Renewable energy, SI engine, Simulation, Mixer*

Nomenclatures:

n	Engine speed (rpm)
p	Pressure (Pa)
m	Mass flow rate (kg/s)
V	Flow velocity (m/s)
S	Section (m ²)
x	Percentage of CH ₄ in biogas (%)
$y=d_{eq}/d_{ad}$	Dimensionless diameter
d_{eq}	Equivalent diameter of biogas supplying pipe (m)
d_{ad}	Diameter of air admission pipe (m)

P_e	Effective power of the engine (HP)
$RAFR$	Relative Air Fuel Ratio
EAR	Excess Air Ratio
$MiCj$	Biogas containing 10i% methane and 10j% carbonic in volume
f	Fuel air equivalence ratio
a	Opening angle of the butterfly valve ($^{\circ}$)
b	Opening angle of biogas ball valve ($^{\circ}$)
r	Density (kg/m^3)
Dp	Pressure differential (Pa)

I. Introduction

Biogas is an attractive renewable source of energy for rural areas. It can be produced from organic wastes, such as dung of animals, plant matter and other wastes of agriculture production. Approximately two-thirds of biogas (in volume) is methane and the rest is mostly carbon dioxide. As a fuel, biogas has a low energy density on the volume because of its high CO_2 content. The burning velocity of biogas is low, just at 25 cm/s as against 38 cm/s for LPG, due to the reason that carbon dioxide may change the combustion behavior of the air–fuel mixture. A large quantity of CO_2 present in biogas lowers its calorific value, burning velocity and flammability range compared with those of natural gas. The self-ignition temperature of biogas is high and hence it resists knocking which is desirable for engines with a relatively high compression ratio to maximize thermal efficiency.

Power and thermal efficiency of biogas engines reached their highest values with the $RAFR$ between 1.05 and 0.95 [1]. Under these conditions, HC and CO emissions were relatively low but the NO_x values were relatively high. Power and thermal efficiency were reduced for leaner mixtures, particularly, though engine speed was increased, emissions were all reduced [1]. Mixtures richer or leaner than this optimal point will cause incomplete combustion or slow down the burning rate and hence lead to a drop in thermal efficiency. Chulyoung Jeong et al. observed that the maximum values of generating efficiency, cylinder pressure, and NO_x emissions were obtained at an EAR of around 1.2 [2], which is slightly higher than the values reported by [1].

A high compression ratio spark ignition engine for biogas can be built by replacing the injectors of a diesel engine by a spark plug and modifying the pistons. It is necessary to maintain a proper ratio between the fuel gas and air in order to attain good combustion [3]. However, since NO_x production in this condition is relatively high, two alternative approaches, slight retardation of spark timing or a little leaner operation which can be applied to control NO_x emission without sacrificing considerable thermal efficiency, were suggested as an optimum and practical operating point for use in an actual biogas site in the future [4].

The supply of the right mixture of air and fuel is therefore of utmost importance for the performance of a biogas spark ignition engine [5]. Further, the engines operating close to the stoichiometric air/fuel ratio display lower levels of emissions of toxic gases. Enhanced methane concentration in biogas (as in methane enriched biogas) significantly improves the engine performance and reduces emissions of hydrocarbons [5].

Thus it is necessary to design appropriate mixers in order to ensure the right mixture with various biogas composition and pressure. In Vietnam, the research team GATEC of the University of Danang [6] has carried out a lot of studies on biogas engine. The results of researches allowed application of biogas on engines in rural areas which is very helpful for climate change mitigation [7]. As the original engines are diverse in structure and dimensions, it is difficult and costly to carry out experiments for determination of basic parameters of appropriate mixers [8-9]. The simulation of mixers will be useful to predict characteristics of the flow under different operation conditions so that we can identify basic dimensions of the mixer corresponding to the size of each engine.

In this research, we study the characteristics of a mixer designed for a biogas spark ignition engine converted from a Jandong ZH1115 diesel engine. The objective of the research is to identify the section of biogas supplying pipe to ensure normal operation of the engine fueled with different components biogas. The experiences taken from this research can be applied on other kinds of diesel engine.

II. Method of Study

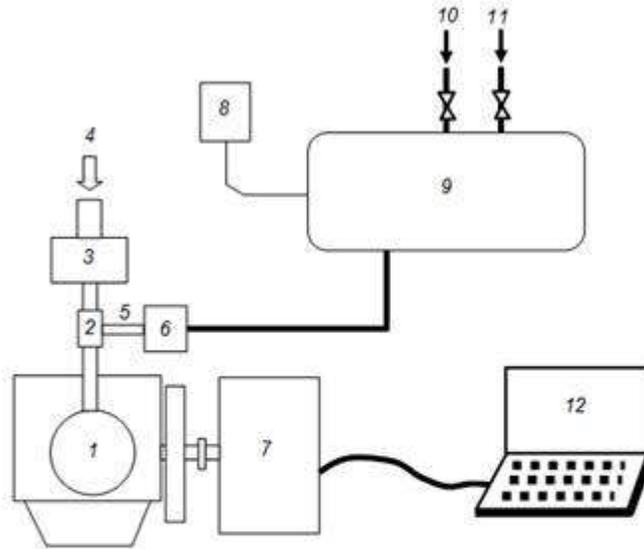


Figure 2: Experimental set up

1. ZH1115 biogas engine; 2. Mixer; 3. Air flowmeter;
4. Air inlet; 5. Biogas supplying pipe; 6. Biogas flowmeter;
7. Froude dynamometer; 8. GFM 435 Biogas analyzer;
9. Biogas mixture bag; 10. Rich biogas source;
11. Poor biogas source; 12. Computer

3. Simulation

The simulation study has been conducted by using the FLUENT CFD Software in ANSYS 14. The 3D meshing of the mixer (Figure 3) has been established by means of the SOLIDWORKS Software. The boundary conditions include air inlet pressure $p_{in_air} = 0$, biogas inlet pressure $p_{biogas_in} = 50\text{Pa}$. The mixture outlet pressure is calculated based on the crankshaft speed and the structure parameters of the engine.

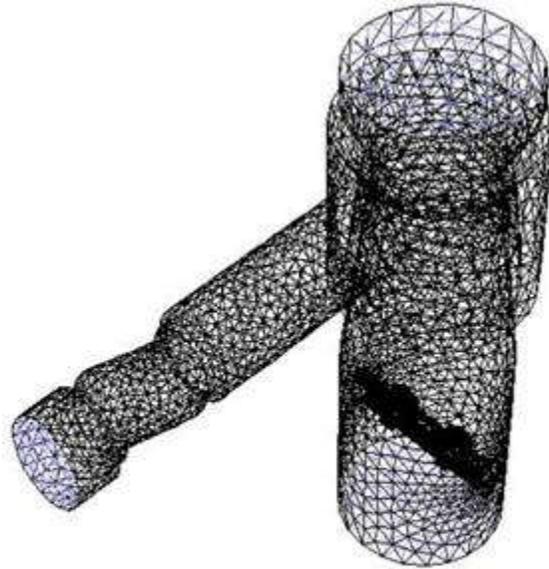


Figure 3: Meshing 3D mixer SOLIDWORKS Software

Table 2: Boundary conditions at mixer outlet

n (rpm)	1000	1200	1400	1600	1800	2000	2200
p _{mix_out} (Pa)	-1608	-2316	-3153	-4118	-5212	-6435	-7786

Density of mixture is supposed to be $\rho = 1,293 \text{ kg/m}^3$. Average mass flow rate of mixture during the intake process is $m = \frac{1,293 \cdot V_s \cdot 2n}{60}$ (kg/s). The vacuum pressure on the intake manifold is $\Delta p = \frac{1}{2} \rho V^2$. Mass flow rate of mixture is also given as $m = k r S V$. In other words, mass flow rate m is proportional to speed V whereas Δp is proportional to V^2 , so it is proportional to m^2 . In order to exclude the coefficient of proportion in the FLUENT calculation, we firstly suppose boundary conditions $p_{\text{mix_out}}$ as $p_{\text{mix_out_propos}}$. The calculation results will give us the supposed mass flow rate: $m_{\text{mix_out_propos}}$ (kg/s). Hence the pressure at mixer outlet with known mass flow rate of the mixture during intake process m_n will be identified by the following expression:

$$p_{\text{mix_out}} = p_{\text{mix_out_propos}} \left(\frac{m_n}{m_{\text{mix_out_propos}}} \right)^2$$

Pressure at the mixer outlet $p_{\text{mix_out}}$ when the open angle of the butterfly valve is 30° , the open angle of the biogas ball valve is 75° , and the biogas fuel contains 70 CH_4 is illustrated in Table 2.

With mass flows of air and biogas given by simulation of each case, we can then calculate the equivalence ratio of mixture supplied to the engine.

Figures 4a, 4b, 4c and 4d introduce calculation results of velocity field, contour of dynamic pressure, contour of O_2 and CH_4 concentrations on the symmetrical surface of the mixer with open angle of the butterfly valve at 30° . We can predict homogeneity of mixture through the mixer with help based on these results.

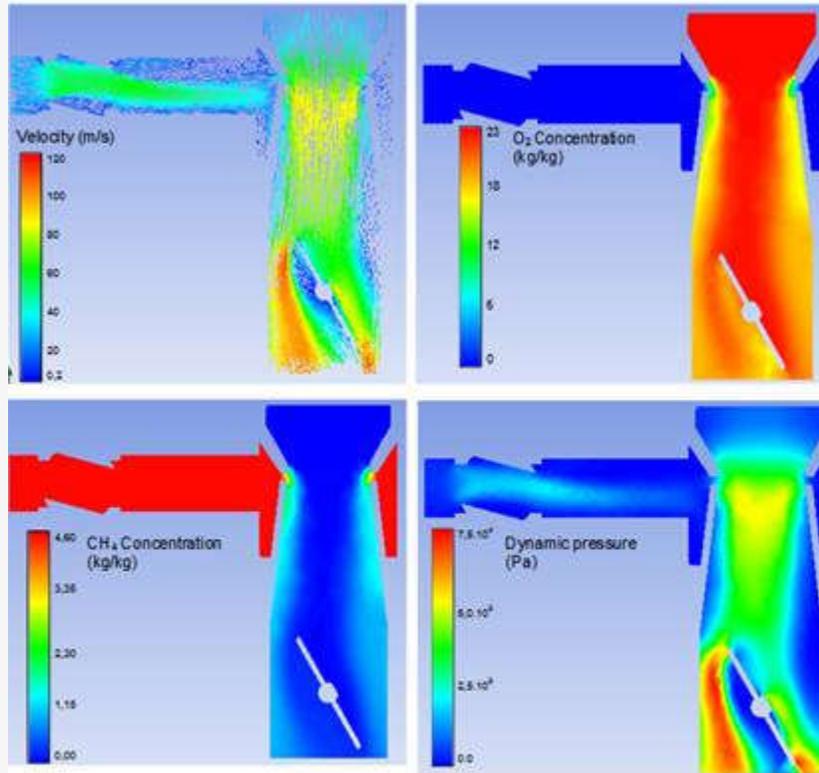


Figure 4: Flow velocity vector (a), contour of dynamic pressure (b), concentrations of CH₄ (c) and O₂ (d) on the symmetrical plane of the mixer.

III. Results and Discussions

1. Simulation Prediction

Figure 5a introduces variations of fuel-air equivalence ratio for the mixture versus speed of an/the engine fueled with biogas containing 60% of CH₄. The biogas ball valve is fully opened (90°). The butterfly valve is opened at positions of 34%, 72%, and 100%, respectively. The engine speed in each case ranges between 1,000 rpm and 2,200 rpm. The calculation results show that when an engine operates on full load curves (with butterfly valve being 100% open), ϕ of mixture is almost stable (ϕ changes from 1.3 to 1.4). When the engine operates on partial load curves, the curve of the fuel-air equivalence ratio varies in function of engine speed: the steeper the engine speed is, the smaller the butterfly valve open level becomes. The change in concentrations at high-speed positions is less than at low-speed positions. At any opening levels of the butterfly valve, when the engine runs at rated speeds between 1,800 rpm and 2,200 rpm, fuel-air equivalence ratio of the mixture changes narrowly from 1.02 to 1.10.

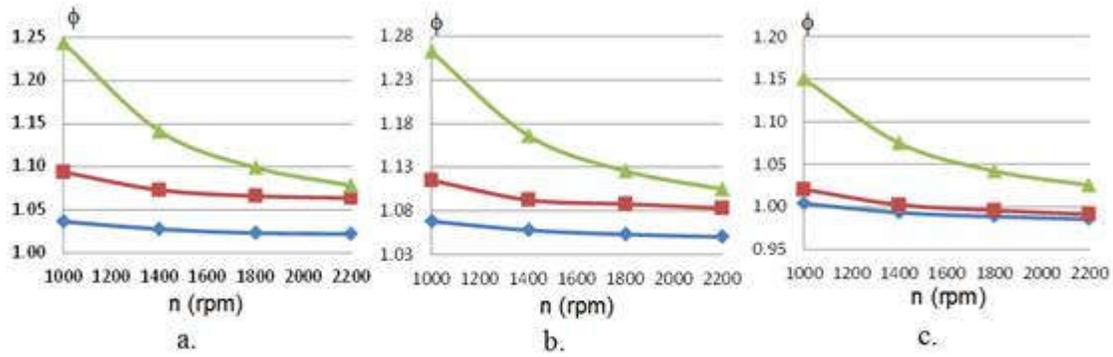


Figure 5: Fuel-air equivalence ratio ϕ vs engine speed
M6C4, ball valve 90° (a); M7C3, ball valve 75° (b); M9C1, ball valve 60° (d);
Butterfly valve opening 34% (▲), 72% (■) and 100% (◆)

Figure 5b introduces the same results with biogas fuel containing 70% of CH₄ and an opening level of the biogas ball valve at 75°. Figure 5c introduces the same results with biogas fuel containing 90% of CH₄, with the opening level of the biogas ball valve at the position of 60°. The results manifest the changing principle of ϕ in terms of n similar to the case in which biogas contains 60% of CH₄. With biogas containing 90% of CH₄, if the opening level of the biogas ball valve is at 60°, the mixture is poor. In order to increase fuel-air equivalence ratio for the mixture in these cases, we can increase the opening levels of the biogas ball valve. On the contrary, in the case that the fuel contains 60% - 70% of CH₄, we can reduce the opening level of the biogas ball valve so as to reduce fuel-air equivalence ratio for the mixture.

The above results show that, when opening levels of the biogas valve and the butterfly valve are given, the fuel-air equivalence ratio for the mixture is slightly reduced as decreasing of the engine speed slows. The bigger the opening level of the butterfly valve, the lower the changing degree of ϕ becomes. When CH₄ concentration in biogas is varied, we can adjust the biogas ball valve to achieve the best fuel-air equivalence ratio ϕ . This adjustment can be made once for each kind of fuel. Table 3 summarizes the results of calculations on the opening levels of the biogas ball valve corresponding to the biogas containing different percentages of CH₄ concentration. The results show that with given a CH₄ concentration, we can choose an appropriate opening level of biogas ball valve so that the fuel-air equivalence ratio ϕ is in optimal range according to [1] at any opening level of butterfly valve.

Table 3: Effect of butterfly valve opening from 34% to 100% on fuel-air equivalence ratio at given CH₄ concentration and opening level of biogas ball valve ($n=2,200$ rpm)

%CH ₄ in biogas	60	70	80	90
Opening levels of biogas ball valve (°)	90	75	65	60
ϕ	1.02-1.08	1.03-1.09	0.97-1.01	0.98-1.02

Figures 6a, 6b and 6c introduce the effect of engine speed on ϕ in relation to the opening level of the butterfly valve with biogas containing 60%, 70% and 90% of CH₄ with opening levels of the biogas ball valve shown in Table 3. The results show that when engine speed and position of the biogas ball valve are fixed, fuel-air equivalence ratio for mixture is reduced as the opening levels of the butterfly valve are increased. When the butterfly valve is fully open (the engine operates on full load curves), the fuel-air equivalence ratio for the mixture is almost unaffected by the engine speed. Therefore the mixer must surely supply the best mixed components when the engine operates on full load curves. Under partial load operation, ϕ slightly increases when the opening level of the butterfly valve is reduced. The results show that with 34% opening of the butterfly valve at 1,000 rpm engine speed, ϕ is about 1.25

compared with its value of approximately 1 a fully opened butterfly valve with biogas containing 60-70% of CH₄. Even when the mixture is richer as the engine runs on partial load curves, \bar{f} s within combustible limit range.

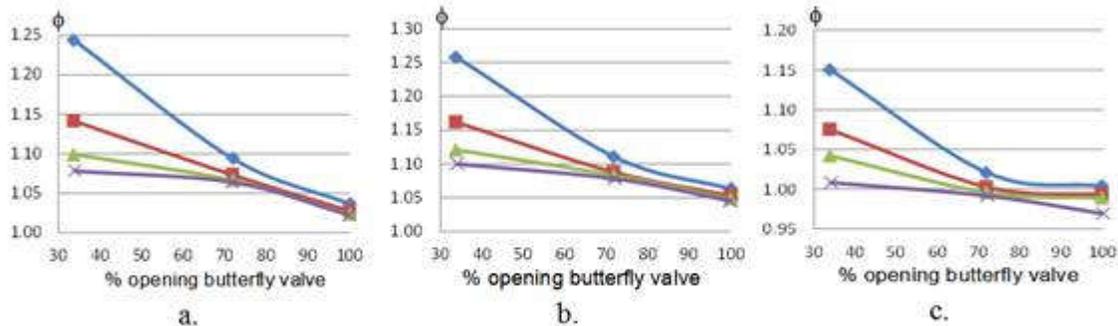


Figure 6: Fuel-air equivalence ratio ϕ vs opening levels of butterfly valve; M6C4, ball valve 90° (a); M7C3, ball valve 75° (b); M9C1, ball valve 60° (c); $n=1,000$ rpm (\blacklozenge), $n=1,400$ rpm (\blacksquare); $n=1,800$ rpm (\blacktriangle) and $n=2,200$ rpm (\times)

However, as the biogas ball valve position, butterfly valve position and engine speed are fixed, \bar{f} changes considerably in accordance with the concentration of CH₄ in biogas fuel. Figure 8 shows that at engine speed of 2,200 rpm, the biogas ball valve is open up to 75° and the butterfly valve is open 72%, \bar{f} reaches 0.85 and 1.65 with biogas containing 60% and 90% CH₄, respectively. Therefore, to obtain an appropriate fuel-air equivalence ratio \bar{f} of the mixture as CH₄ concentration in biogas changes, we must change the opening levels of the biogas ball valve.

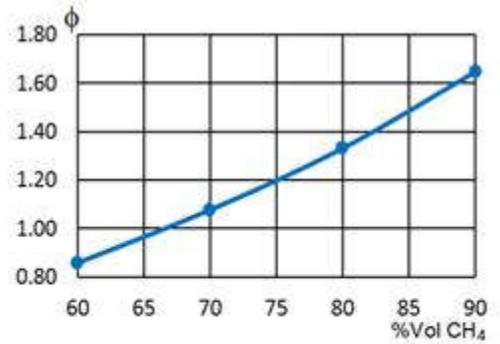


Figure 7: Mixture concentrations proportional to CH₄ concentrations in biogas (ball valve opening 75°; butterfly valve opening 72%; $n=2,200$ rpm)

Figures 8a, 8b and 8c introduce the effect of biogas fuel and opening levels of the biogas ball valve on change of \bar{f} in function of opening levels of the butterfly valve. With a given engine speed, the tangent of curves are almost similar, independent of CH₄ concentration in biogas fuel. So if we adjust the position of the biogas ball valve so that for a given opening level of the butterfly valve we obtain the same \bar{f} of mixture, then we can represent a linear relationship between \bar{f} and the opening level of the butterfly valve.

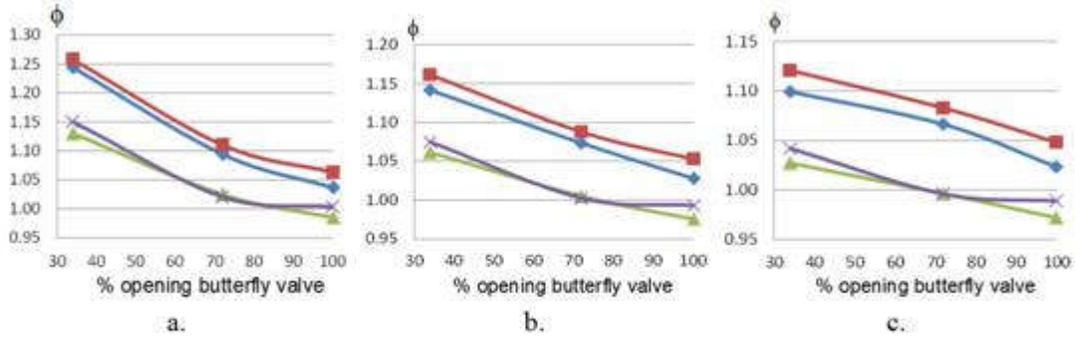


Figure 8: Fuel-air equivalence ratio ϕ vs opening levels of butterfly valve
 $n = 1,000$ rpm(a); $n = 1,800$ rpm (b); $n = 2,200$ rpm (c);
M6C4, ball valve 90° (◆); M7C3, ball valve 75° (■);
M8C2, ball valve 65° (▲); M9C1, ball valve 60° (×).

Figure 9 illustrates the variation of \bar{f}_n function of butterfly valve opening levels with biogas containing 60%, 70%, 80%, and 90% of CH_4 and opening levels of the biogas ball valve of 90° , 74° , 67° , and 61° , respectively. At 34% opening level of the butterfly valve, \bar{f}_s is in range between 1.06 and 1.08. When the butterfly valve is fully opened \bar{f}_s oscillates from 1.02 to 1.05. These results show that the tangent of the curves is -0.0006 (if the opening level of the butterfly valve is in percentage).


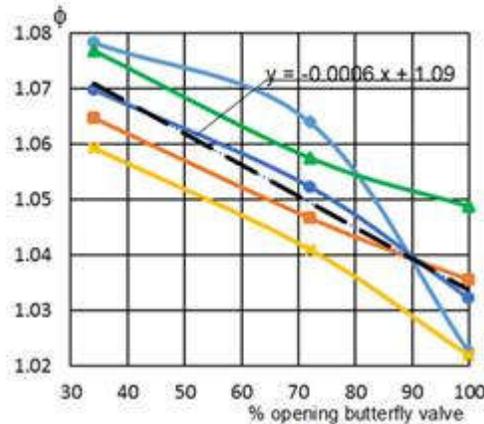


Figure 9: Variation of fuel-air equivalence ratio in accordance with butterfly valve opening levels
M6C4, ball valve 90° (◆);
M7C3, ball valve 74° (■);
M8C2, ball valve 67° (▲);
M9C1, ball valve 61° (×).

As the tangent of the curves is very slight, we can consider \bar{f}_s unchanged in relation to opening levels of the butterfly valve. Contrarily, \bar{f}_ϕ of the mixture changes sharply in relation to the opening levels of the biogas ball valve and CH_4 concentrations in biogas fuel. This means that for a given biogas, we need to determine the size of the pipe that supplies biogas to the mixer in relation to the size of the air admission pipe so that \bar{f}_s is in optimal range observed by Huang et al. [1] or by Jeong et al. [2] at any level of butterfly valve opening. In this case, we need not equip the biogas ball valve with the supplying pipe.

Figure 10 introduces the variation of dimensionless diameter $\gamma = d_{\text{eq}}/d_{\text{ad}}$ of the biogas supplying pipe in accordance with the concentration of CH_4 in the fuel in case of ZH1115 biogas engine. When CH_4 concentration in biogas increases, the amount of biogas supplied to the mixture must decrease to

ensure that f of the mixture is unchanged. Because mass flow rate m is proportional to the flow section S , in other words, it is proportional to the square of the dimensionless diameter of the biogas-supplying pipe y , or the diameter y is in proportion to $m^{0.5}$. Otherwise, to keep constant f , when the CH_4 concentration in fuel increases, the mass flow rate of fuel decreases. This means that dimensionless diameter of biogas supplying pipe is proportional to $x^{-0.5}$. Figure 10 shows that the exponent of the curve is -0.515. The absolute value of the exponent is slightly higher than 0.5. This is reasonable because when the biogas mass flow rate changes, the air mass flow rate is also changed to ensure the constant value of f .

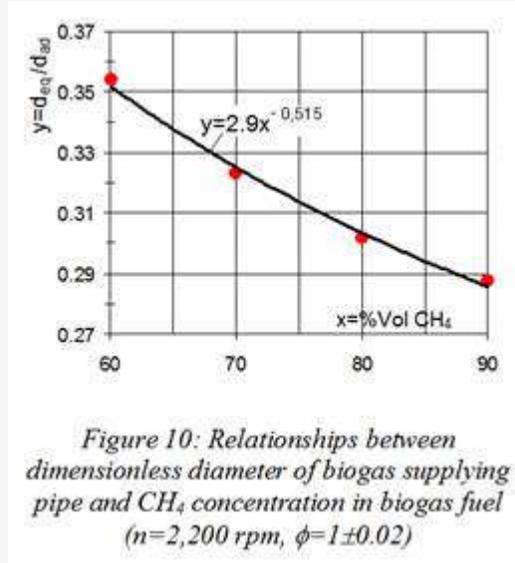

2. Experiment Valuation

Figures 11a, 11b, and 11c introduce the variation of equivalence ratio versus engine speed at full load regime. Biogas contains 60%, 73%, and 87% of CH_4 concentrations. Biogas supplying pipes are selected with diameters of 18mm, 16mm, and 14.5mm, respectively, corresponding to the relationships shown in Figure 10. During experimentation, the butterfly valve is fully open. The results show that equivalence ratios given by simulation are fitted well to their values given by experiment with different CH_4 concentration in biogas. This confirms that the relationship in Figure 10 is reasonable.

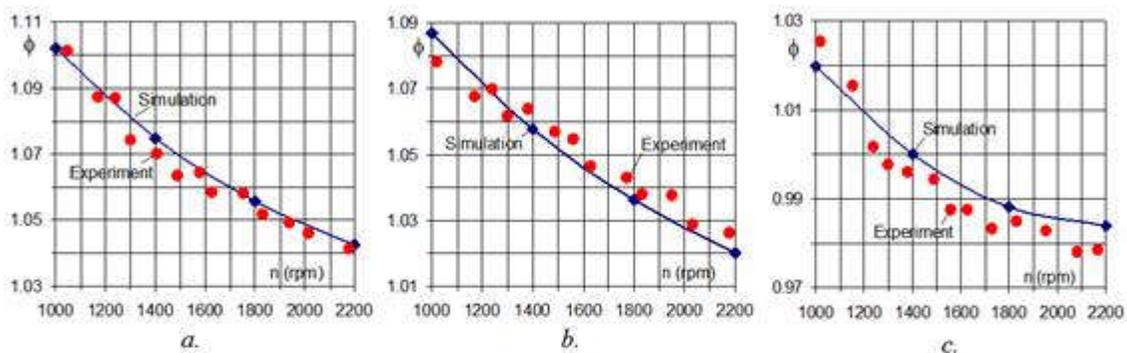


Figure 12 introduces full load characteristic curves of ZH biogas engine fueled with biogas containing 60%, 73%, and 87% CH_4 concentrations. The results show that at the speed of 2,500rpm, the maximum power of engine run by the biogas containing 87% of CH_4 is 21 HP. Calculated power via

proportions of CH_4 passing into a/the cylinder of the engine fueled with biogas containing 73% and 60% of CH_4 will be 20.58HP and 20.03HP, respectively. The experimental data are suitable for the first case, but as for the final case (biogas containing 60% of CH_4), the real power is much lower than that of the calculation. This is because of incomplete combustion due to high concentration of CO_2 in biogas. The suitability of the power proportions when the ZH1115 engine is run by biogas containing different concentrations of CH_4 affirms that the relationships between the biogas supplying pipes with the CH_4 concentrations in biogas shown in Figure 7 are accurate.

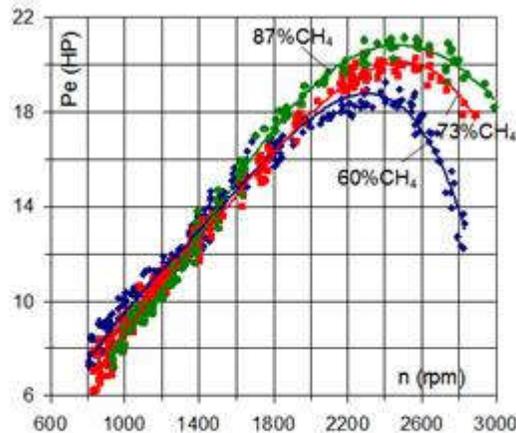


Figure 12: Performance curves of the ZH1115 when operating with biogas containing different CH_4 concentrations

The results of this research are very useful to convert an existing engine running on diesel that is largely used in rural areas into biogas engine. Previously for converting a diesel engine into biogas engine we have to conduct a lot of experimental tests to determine appropriate parameters of the mixer. This takes a lot of time and money. Now thanks to this new method of simulation we can orient the technology of conversion. This way can be applied generally to any kind of diesel engine. This is very helpful in reducing the cost of conversion that will encourage numerous farmers to use biogas in their machines. It is an effective contribution to climate change mitigation.

IV. Conclusion

For this paper, we have studied the optimal parameters of a mixer in order to transform a typical diesel engine to a biogas spark ignition engine which can produce high effectiveness. We have drawn the following conclusions from the results.

1. With venturi type mixer designed for biogas SI engine, the equivalence ratio is less dependent on the opening of the butterfly valve which controls the mixture flow but it sharply depends on CH_4 concentration in biogas and/or on sections of the biogas supplying pipe.
2. At full load, the equivalence ratio given by the mixer is slightly changed in relation to engine speed but at partial load, it strongly depends on engine speed, particularly at low regime.
3. The dimensionless diameter of the biogas supplying pipe can be generally expressed by a power relationship with CH_4 concentration in biogas with exponent of -0.515.

References

1. Jingdang Huang and R. J. Crookes: *Assessment of simulated biogas as a fuel for the spark ignition engine*. Fuel Vol. 77, No. 15, pp. 1793–1801, 1998
2. Chulyoung Jeong, Taesoo Kim, Kyungtaek Lee, Soonho Song, Kwang Min Chun: *Generating efficiency and emissions of a spark-ignition gas engine generator fuelled with biogas–hydrogen blends*. International Journal of hydrogen energy 34 (2009) 9620-9627
3. R. Chandra, V.K. Vijay, P.M.V. Subbarao, T.K. Khura: *Performance evaluation of a constant speed IC engine on CNG, methane enriched biogas and biogas*. Applied Energy 88 (2011) 3969–3977
4. E. Porpatham, A. Ramesh, B. Nagalingam: *Investigation on the effect of concentration of methane in biogas when used as a fuel for a spark ignition engine*. Fuel 87 (2008) 1651–1659
5. Cheolwoong Park, Seunghyun Park, Yonggyu Lee, Changgi Kim, Sunyoup Lee, Yasuo Moriyoshi: *Performance and emission characteristics of a SI engine fueled by low calorific biogas blended with hydrogen*. International Journal of hydrogen energy 36 (2011) 10080-10088
6. www.dongcobiogas.com
7. Bui Van Ga, Tran Van Nam, Truong Le Bich Tram: *Engines fueled by biogas: A contribution to energy saving and climate change mitigation*. The 6th Seminar on Environment Science and Technology Issues Related to Climate Change Mitigation. Japan-Vietnam Core University Program, Osaka, Japan, 26-28 November 2008
8. Bui Van Ga, Tran Van Nam, Tran Thanh Hai Tung, Le Minh Tien, Le Xuan Thach: *Study of Performance of Biogas Spark Ignition Engine Converted from Diesel Engine*. The International Conference on Green Technology and Sustainable Development. Hochiminh City, Vietnam, September 29-30, 2012
9. Bui Van Ga, Tran Van Nam, Le Minh Tien, Le Xuan Thach: *Effect of CH₄ concentration, spark timing and compression ratio to biogas engine performance*. National Review of Transport No5-2013, pp. 7-9 and 13 (in Vietnamese)